


XJF30290

XJFFAN

Bearing Type: Ball/Sleeve bearing

Air Flow: 120~130CFM

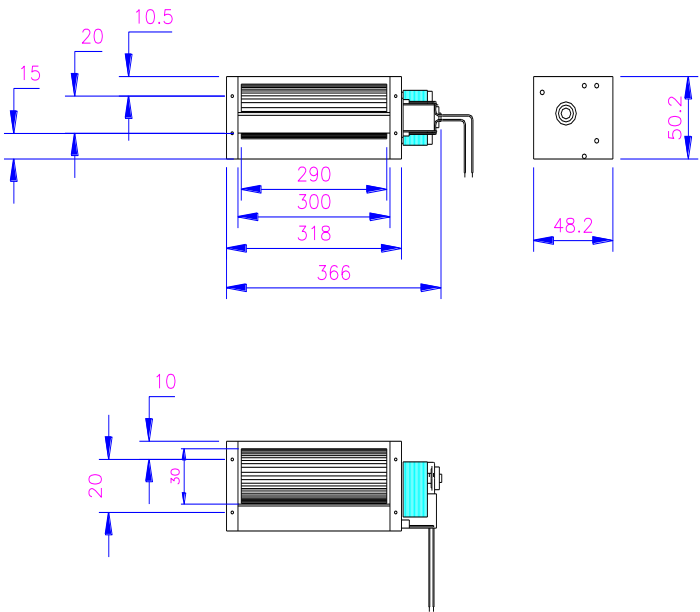

规格型号 P/N	电压 Rating Voltage(VAC)	频率 Frequency (Hz)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	噪声 Noise (dBA)
XJF30290-110	110	60	0.26	17	S	2900	130	39
XJF30290-220	220	50	0.16	14	S	2600	120	38
XJF30290-110	110	60	0.26	17	B	2900	130	39
XJF30290-220	220	50	0.16	14	B	2600	120	38