


XJH60180

Bearing Type: Ball/Sleeve bearing

Air Flow: 80 CFM



XJHAN

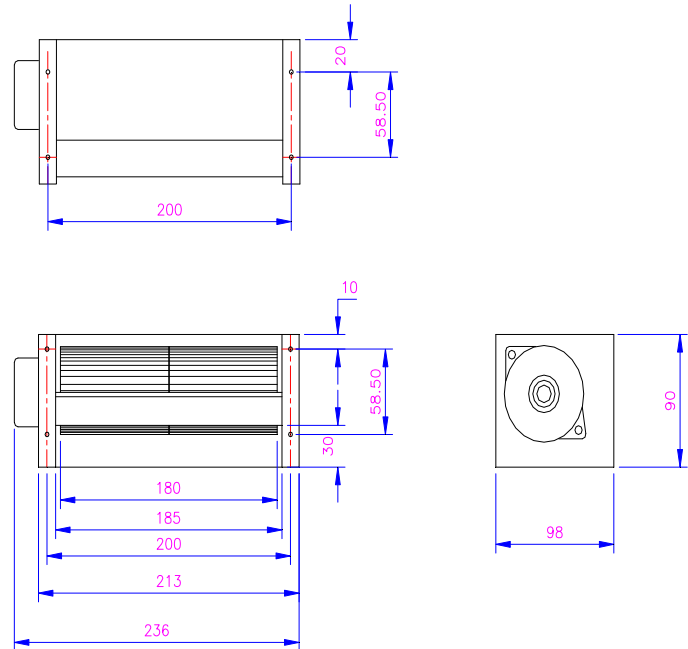

规格型号 P/N	电压 Rating Voltage(DC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	噪声 Noise (dBA)
XJH60180-DC12	12	0.85	10	S	1900	76	35
XJH60180-DC24	24	0.43	10	S	1900	76	35
XJH60180-DC12	12	0.85	10	B	2000	80	35
XJH60180-DC24	24	0.43	10	B	2000	80	35