


XJF30250

XJFFAN

Bearing Type: Ball/Sleeve bearing

Air Flow: 32CFM

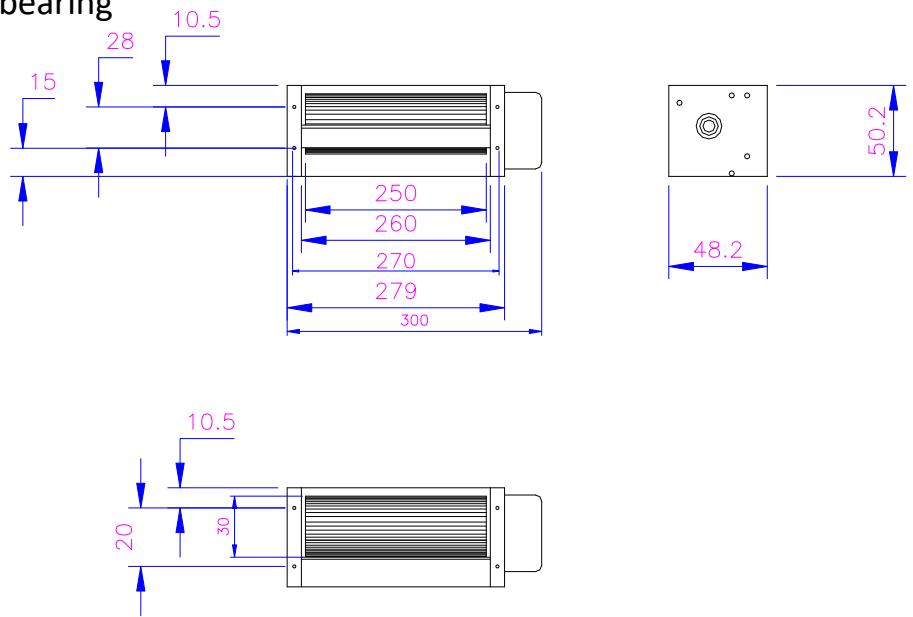

规格型号 P/N	电压 Rating Voltage(DC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	噪声 Noise (dBA)
XJF30250-DC12	12	0.23	2.8	S	2300	32	31
XJF30250-DC24	24	0.18	4.3	S	2300	32	31
XJF30250-DC12	12	0.23	2.8	B	2300	32	31
XJF30250-DC24	24	0.18	4.3	B	2300	32	31